Authorized Dealer Distributor
Clegg Company, LLC
1444 South Kelly Road
Schenectady, NY 12306
Phone (518) 864-5396
Fax (518) 864-5474
Toll Free 800 761-3122

Dock Bumpers

Constructed of fabric reinforced rubber from recycled truck tires

Pads are laminated between painted structural angles and held together with 3/4" steel tie rods

Installation by bolting or welding units to dock

Width is bolt hole center to bolt hole center

Bolt holes are 13/16" in diameter

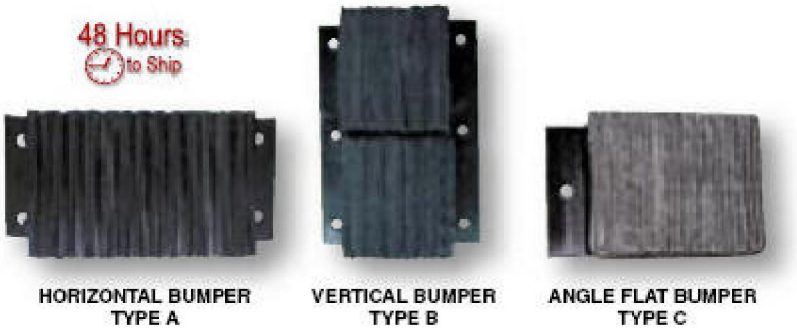

Model	Description	Price	Net Weight
1012-4.5	10"H x 12"W x 4.5" Projection	$39.00	33
1014-4.5	10"H x 14"W x 4.5" Projection	$41.00	38
1018-4.5	10"H x 18"W x 4.5" Projection	$47.00	48
1024-4.5	10"H x 24"W x 4.5" Projection	$57.00	63
1030-4.5	10"H x 30"W x 4.5" Projection	$63.00	79
1036-4.5	10"H x 36"W x 4.5" Projection	$70.00	94
1096-4.5	10"H x 96"W x 4.5" Projection	$264.00	286
1212-4.5	12"H x 12"W x 4.5" Projection	$40.00	41
1214-4.5	12"H x 14"W x 4.5" Projection	$42.00	48
1218-4.5	12"H x 18"W x 4.5" Projection	$52.00	60
1224-4.5	12"H x 24"W x 4.5" Projection	$64.00	79
1230-4.5	12"H x 30"W x 4.5" Projection	$72.00	97
1236-4.5	12"H x 36"W x 4.5" Projection	$89.00	120
1296-4.5	12"H x 96"W x 4.5" Projection	$307.00	333
624-4.5	6"H x 24"W x 4.5" Projection	$47.00	42
636-4.5	6"H x 36"W x 4.5" Projection	$59.00	61
1014-4.5F	10"H x 14"W x 4.5" Projection - Flat one side	$57.00	38
1214-4.5F	12"H x 14"W x 4.5" Projection - Flat one side	$58.00	48
V-1120-4.5	20"H x 11"W x 4.5" Projection - Vertical Style	$55.00	61
V-1124-4.5	24"H x 11"W x 4.5" Projection - Vertical Style	$62.00	61
V-1130-4.5	30"H x 11"W x 4.5" Projection - Vertical Style	$81.00	92
V-1136-4.5	36"H x 11"W x 4.5" Projection - Vertical Style	$94.00	114

01/2010 Pricing

Authorized Dealer/Distributor

Clegg Company, LLC
1444 South Kelly Road
Schenectady, New York 12306
518-864-5396
518-864-5474 fax

HORIZONTAL BUMPER TYPE A

VERTICAL BUMPER TYPE B



ANGLE FLAT BUMPER TYPE C

Model	Description	Price	Net Weight
1012-6	10"H x 12"W x 6" Projection	$48.00	39
1014-6	10"H x 14"W x 6" Projection	$50.00	45
1018-6	10"H x 18"W x 6" Projection	$64.00	58
1024-6	10"H x 24"W x 6" Projection	$70.00	85
1030-6	10"H x 30"W x 6" Projection	$77.00	98
1036-6	10"H x 36"W x 6" Projection	$95.00	123
1212-6	12"H x 12"W x 6" Projection	$52.00	49
1214-6	12"H x 14"W x 6" Projection	$55.00	56
1218-6	12"H x 18"W x 6" Projection	$68.00	72
1224-6	12"H x 24"W x 6" Projection	$77.00	97
1230-6	12"H x 30"W x 6" Projection	$94.00	121
1236-6	12"H x 36"W x 6" Projection	$114.00	145
1296-6	12"H x 96"W x 6" Projection	$451.00	341
V-1120-6	20"H x 11"W x 6" Projection - Vertical Style	$79.00	78
V-1124-6	24"H x 11"W x 6" Projection - Vertical Style	$88.00	96
V-1130-6	30"H x 11"W x 6" Projection - Vertical Style	$136.00	118
V-1136-6	36"H x 11"W x 6" Projection - Vertical Style	$141.00	145

Model	Description	Price
AS-344	Concrete Anchor Bolt 3/4"x4" (Laminated Bumpers)	$3.00
AS-346	Concrete Anchor Bolt 3/4"x6" (Molded Bumpers)	$3.50
BIT-3/4	Masonry Bit 3/4"	$15.00

01/2010 Pricing